

MAGNETIC ATTRACTION



A recent survey reviews this industry's installed base of flowmeters, the types of fluids measured, and other select issues relating to flow measurement

ccording to a survey of 299 flowmeter users by Flow Research Ducker and Worldwide, magnetic-type flowmeters account for 43 percent of total flowmeters used in the food and beverage industry in terms of units (see Figure 1, above). This percentage of use is by far greater than that of any other type of flowmeter. Differential pressure and turbine flowmeters constitute a distant second and third in terms of installed base (10.5 percent and 9.7 percent, respectively).

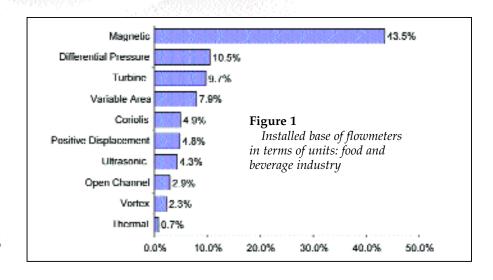

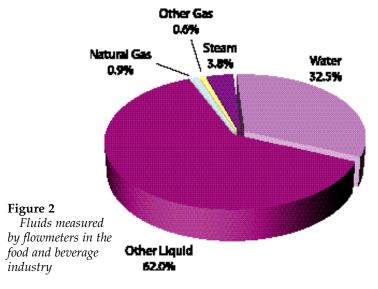

Flowmeter Applications	Survey Respondents Using Application (Percent) Total = 299
Water – measurement/flow	30.80
Liquids – measure flow	12.80
Monitor waste water/liquid	7.70
Production of beer	7.70
Measure cooking oil	7.70
Measure edible fats/oil	7.70
Measure flow of fruit juice/Control and regulate flow of juice	5.10
Sugar – measure and control flow of sugar	solution 5.10
Measure volume of milk	5.10
Measure speed when beer is being bottled	5.10
Process control/Flow process	2.60
Natural gas – measure	2.60
Steam – monitor flow	2.60
Gas – monitor flow	2.60
Batch purposes/Batch control	2.60
Measure flow of ingredients when making a	a paste 2.60
Measure volume of cleaning fluid	2.60
Control pasteurization flow	2.60
Control volume	2.60
Conditioning juice	2.60
On decarbonization filters	2.60
Measure cod liver oil	2.60
Measure quantity	2.60
Measure beverage	2.60
Measure speed of truck cleansing	2.60
Iced water placement in truck	2.60
Remove and peel off certain substances	2.60
Measure wine	2.60
Beer placement in truck for transportation	2.60
Spirit transfer	2.60
Measure power supply	2.60

Note: total of percentages are greater than 100 percent due to possible multiple responses in survey.

Figure 3 Flowmeter application usage in the food and beverage industry

Magnetic Flowmeter Popularity

Magnetic flowmeters are popular in the food and beverage industry because they are nonintrusive, thereby interfering very little with the liquid being measured. While Coriolis meters are also used, those designed around curved tubes may have cleaning issues. Magnetic flowmeters, which keep the flow in a straight line, can be readily cleaned with procedures known as clean-in-place (CIP) and steam-in-place (SIP). With these procedures, the flowmeters are flushed with very hot water or steam for several minutes until clean.

Magnetic flowmeters are also widely used in the food and beverage



Circle 25 or Request Info Instantly at www.flowcontrolnetwork.com

October 2003 37 www.FlowControlNetwork.com

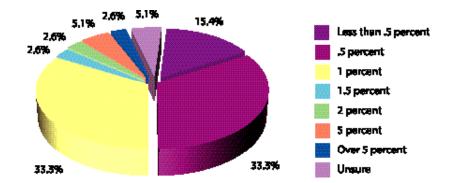


Figure 4
What degree of accuracy do you require in your flowmeters?

industry because they have a number of different linings suitable for sanitary applications. Lining options often represent a significant consideration when purchasing flowmeters. Types of liners include hard and soft rubber, polyurethane, Teflon, PFA, and ceramic. Liners are selected based on a number of factors including cost, temperature and pressure range of the

liquid, and the caustic nature of the liquid. For example, PFA and Teflon are quite tolerant of high temperatures, while polyurethane performs better at lower temperatures.

Fluid Measurement Requirements

Popularity of magnetic flowmeters is also attributed to the fact liquids

constitute the largest percentage of fluids measured in the food and beverage industry. Figure 2 (see page 36) illustrates how end users responded when asked what type of fluid their flowmeters are measuring. Almost 95 percent of fluids measured by flowmeter are either water or other type of liquid. Gas and steam flow measurement accounts for the



Sealed Metering Technology 340W Isolated Probe System

Por over 30 years, BIF has been providing the latest solids bearing fluids metering technology, supplying the most economic, viable solution utilizing leading technologies in meeting your needs. The 340W IPS spells the end to



deposits, fouled pressure lines and air entrapment that hinder highly accurate flow measurement available from our Universal Venturi Tube™.

The 340W IPS is easily installed, calibrated and verified in the field with simple and accurate manometry.

It can be installed on your existing SBF units. Even venturis not originally supplied by BIF can be retrofitted.


Attention

SBF and SBF-II Systems can easily migrate to the 340W IPS

Combining Innovation, Expertise and Integrity in Meeting Today's Flow Measurement Requirements

30685 Solon Industrial Parkway Unit F - Solon, OH 44139-4388 Phone 440-519-BIF1 (2431) / Fax 440-519-BIF2 (2432)

Circle 28 or Request Info Instantly at www.flowcontrolnetwork.com

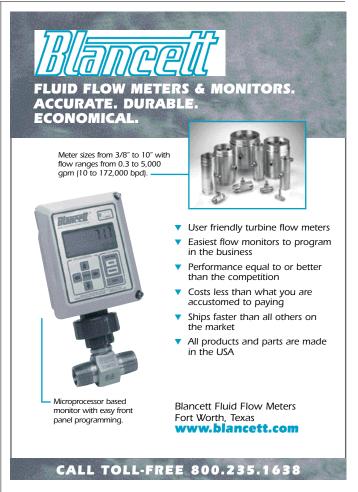

Circle 30 or Request Info Instantly at www.flowcontrolnetwork.com


38 October 2003 Flow Control

remaining proportion, according to survey results.

When evaluating application suitability, magnetic flowmeters are uniquely qualified with regard to liquid measurement requirements. Due to conductivity limitations, magnetic flowmeters are unable to measure steam and gas flow. And, by selecting the most appropriate liner, this type of flowmeter can manage a variety of temperatures, pressures, and caustic materials. Magnetic flowmeters are also able to measure liquid flows with a high degree of accuracy, often in the range of ±0.5 percent.

Flowmeter Applications

Figure 3 (page 37) delineates common flowmeter application usage in the food and beverage industry according to survey results. In addition to measuring unspecified types

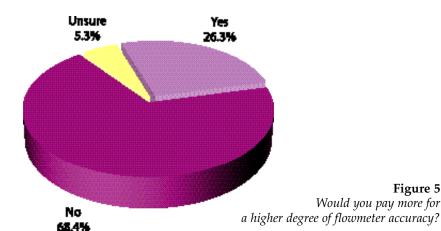

of liquids, flowmeters are also used to measure a variety of liquids such as milk, beer, cooking oil, and edible fats. These measurements are made possible by a variety of flowmeter types that take into consideration factors

Accuracy Considerations


Flowmeter accuracy requirements

such as liquid viscosity, for example.


rate high in level of importance among end users surveyed (see Figure 4, page 38). The majority of respondents (80%) define accuracy level needs of at least ± 1 percent. Some flowmeters are used in custody transfer and billing applications. Others are used for measuring internal transfers of fluids. These results are consistent with data from other

Figure 5

Would you pay more for

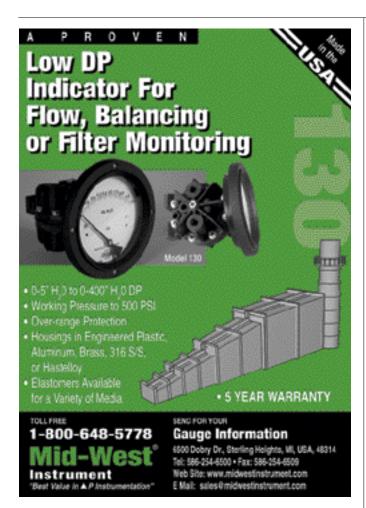

Circle 27 or Request Info Instantly at www.flowcontrolnetwork.com

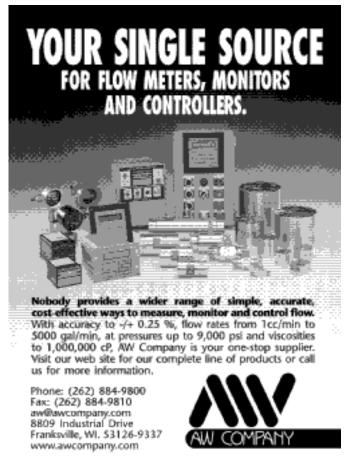

Circle 33 or Request Info Instantiv at www.flowcontrolnetwork.com

October 2003 39 www.FlowControlNetwork.com



OUR FLOWMETER ADVANTAGES:




- Mount in any orientation
- Easy to read, familiar dial
- Measure dirty & opaque fluids
- Durability





www.orangeresearch.com toll-free: 800 989-5657

Circle 47 or Request Info Instantly at www.flowcontrolnetwork.com

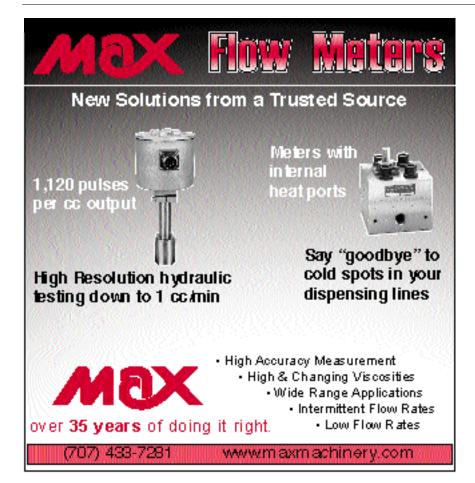

Circle 46 or Request Info Instantly at www.flowcontrolnetwork.com

process industries..

Balancing high accuracy requirements with cost is a challenge warranting careful consideration by users. Coriolis meters are highly accurate, but are also more expensive than most other meters on the market. When users were asked whether they would pay more for a higher degree of flowmeter accuracy, approximately one quarter affirmed. This is a compelling statistic worthy of further investigation as research and development efforts in the food and beverage industry may need to be revisited to better meet the needs of the market served. 😥

Summary

The food and beverage industry is unique because of its high level of liquid measurement. For this and other reasons, magnetic flowmeters dominate the industry. There are numerous applications that focus on measuring particular types of liquids. Similar to process industries, there is a significant demand for high-level accuracy in the food and beverage industry. As indicated in recent survey data, approximately one in four flowmeter users would pay more for a higher degree of measurement accuracy.

About the Author

Dr. Jesse Yoder is president of Flow Research, which he founded in 1998. He has been a writer and analyst in process control since 1986. Dr. Yoder has written over 40 market studies and is currently completing a 12-volume series of studies on the worldwide flowmeter market. Included in this series is The World Market for Flowmeters, which includes all flow technologies. Flow Research (www.flowresearch.com) offers a quarterly update service called the Worldflow Monitoring Service. You can contact Dr. Yoder by phone at 781 245-3200 or by e-mail at jesse@flowresearch.com.